

PRO-Link[®] Farm Forks

P: 855-361-5987 F: 855-818-8865 sales@pro-link.us

Cross Section	Capacity	Stock Lengths
138x4	4,000 lbs/pair	42, 48
150x4	5,000 lbs/pair	42, 48, 60
175x4	6,000 lbs/pair	42, 48, 60, 72
175x5	8,000 lbs/pair	48, 60, 72
2x4	8,000 lbs/pair	48, 60
2x5	10,000 lbs/pair	42, 48, 54, 60, 72, 96
2x6	12,000 lbs/pair	42, 48, 60, 72



All forks meet or exceed ANSI and ISO standards for quality and performance. Forks are rated on a 24" load center with a minimum 3:1 safety ratio and are sold in pairs. Listed forks are for ITA applications, class 2 and class 3. If these variations do not meet your requirements, call us for additional solutions to your needs.



Application	Kit Capacity	Bucket Opening	Blade Length
Small Tractor	2,500 lbs	Up to 26"	42"
Small Tractor	2,500 lbs	Up to 34"	42" or 48"
Backhoe	6,000 lbs	Up to 43"	48"
Backhoe	8,000 lbs	Up to 45"	48"

Each bucket fork kit includes:

- One Pair of forks with pre-welded eye.
- One high strength shaft (1" for tractors, 2" for backhoes)
- Weld on top hooks (3 flat bottom profile for tractors, and 4 flat bottom profile for backhoes)

Top mount bucket forks are an excellent fork alternative for tractor and backhoe applications without a common quick attach coupler. With quick, hands free mount/dismount these fork kits protect your bucket from clamp or bolt on damage, and eliminate the hassle of handling bolt on/clamp on "forks". All forks meet or exceed ANSI and ISO standards for quality and performance. Forks are rated on a 24" load center with a minimum 3:1 safety ratio. If these variations do not meet your requirements, call us for additional solutions to your needs.

Fork Extensions

- Designed to mount on forks as load stabilizers.
- Maximum length is 1.5 times the fork length
 - Custom extensions are available. Call for information.


Fork Width	Stock Lengths
4"	63, 72, 84, 96
5"	63, 72, 84, 96
6"	72, 96



Carriage Bars

- Standard ITA Carriage bars with 20° bevel.
- Precut notches on upper and lower bars.

ITA Class	Stock Lengths
2A	47, 60
3A	47, 72

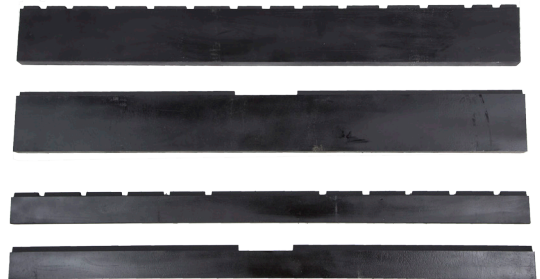

Part Number	Wire Size	Solid Wire	Specs	Shielded Core
PW50C6SM-09	.035	✓	ER70S-6	
PW50C6SM-114	.045	✓	ER70S-6	
PWT711-114	.045		E71T-1	✓

High quality welding wire in single 33 pound rolls or in pallet lots are available. Call for details.

